

T.A. DI MISURA A CAVO PASSANTE Ø80

Ø80 Cable passing measuring CTs

**NEW!****EAC**UKRMETR TEST
STANDARD**Kz - Kazakhstan****INPUT:**
200A...
2500A**5A****OUTPUT:**
1A

DATI TECNICI - Technical data

custodia in materiale termoplastico autoestinguente
frequenza funzionamento
tensione di riferimento per l'isolamento
tensione di prova
isolamento
grado di protezione
grado di protezione con coprimorsetti
sovracorrente permanente
corrente termica di breve durata nominale (I th)

corrente dinamica nominale (I dyn)
fattore di sicurezza
max. potenza dissipata (portata max.)
temperatura di funzionamento
temperatura di magazzinaggio
costruzione a norme

self extinguishing
thermoplastic material
operating frequency
insulation reference voltage
test voltage
insulation
protection degree
protection degree with terminal covers
continuous overcurrent
rated short-time thermal current (I th)

UL94-V0
50÷60 Hz
0,72 kV
3 kV x 1'50 Hz
classe E
IP 00
IP 20
100% Ipr
< 60 x Ipr
(max. 90kA/1s)
2,5 x I th
N ≤ 5
≤ 20W
-25 +50 °C
-40 +80 °C
IEC/EN 61869-1
IEC/EN 61869-2

rated dynamic current (I dyn)
safety factor
max. power dissipation (max range value)
operating temperature
storage temperature
manufactured according to

TIPO - Type

DIMENSIONI - Dimensions



Rapporto Ratio	Cl. 0,5	Cl. 1	Codice - Code
	VA	VA	
200/5A	-	2	TAT079200X05
300/5A	2	4	TAT079300X05
400/5A	4	6	TAT079400X05
500/5A	6	8	TAT079500X05
600/5A	6	10	TAT079600X05
800/5A	8	12	TAT079800X05
1000/5A	10	15	TAT0791K0X05
1200/5A	12	18	TAT0791K2X05
1500/5A	15	20	TAT0791K5X05
2000/5A	18	25	TAT0792K0X05
2500/5A	20	30	TAT0792K5X05

Sono disponibili i trasformatori con secondario 1A e pari prestazioni, i codici di ordinazione sono come in tabella ma con ultima cifra 1

CTs at 1A secondary current are also available. The burdens are the same as 5A CTs. The ordering codes are the same as those in the above table but the last figure shall be 1 instead of 5.

Esempio / Example

TA.....05 (secondario/secondary 5A) TA.....01 (secondario/secondary 1A)

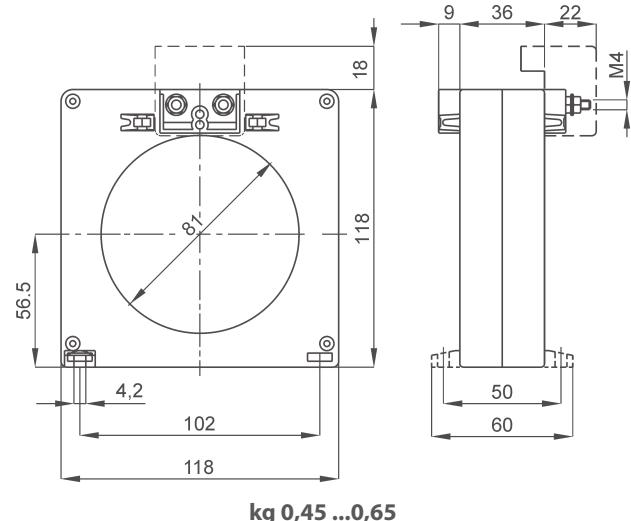

Siglatura morsetti primario e secondario
Primary and secondary connections marking

ACCESSORI IN DOTAZIONE	
- 2 piedini fissaggio TA a parete	
SUPPLIED ACCESSORIES	
- CT wall mounting fixing set (2pcs)	

OPZIONI - OPTIONS

Coprimorsetti cod. **9SBMCTA125**
Coprimorsetti sigillabile cod. **9SBMCTA125S**
Terminals cover cod. **9SBMCTA125**
Sealable terminals cover cod. **9SBMCTA125S**

