



T.A. DI PROTEZIONE APRIBILI

Split-core protection CTs

TAA...

NEW!



Sistema di apertura e chiusura a scatto!
Snap open and closing system!

INPUT: 200A...
5000A

OUTPUT: 5A
1A

custodia in materiale
termoplastico autoestinguente
frequenza funzionamento
tensione di riferimento per l'isolamento
tensione di prova
isolamento
grado di protezione
sovracorrente permanente
corrente termica di breve durata nominale (I th)

corrente dinamica nominale (I dyn)
temperatura di funzionamento
temperatura di magazzino
costruzione a norme

terminali secondari a molla integrati

self extinguishing
thermoplastic material
operating frequency
insulation reference voltage
test voltage

insulation
protection degree
continuous overcurrent
rated short-time thermal current (I th)

rated dynamic current (I dyn)
operating temperature
storage temperature
manufactured according to

integrated secondary cage clamps terminals

UL94-V0
50÷60 Hz
0,72 kV
3 kV x 1'50 Hz
classe E
IP 20
100% Ipr
< 60 x Ipr
(max. 90kA/1s)
2,5 x I th
-25 +50 °C
-20 +80 °C
IEC/EN 61869-1
IEC/EN 61869-2
6mm²


TIPO - Type

DIMENSIONI - Dimensions

Tipo Type	Rapporto Ratio	Codice - Code					
		VA	Cl. 5P5	VA	Cl. 5P10	VA	Cl. 5P15
TAA033 24x34	200/5A	1	TAA033200K05				
	250/5A	2.5	TAA033250K05				
	300/5A	2.5	TAA033300K05				
	400/5A	5	TAA033400K05				
	500/5A	5	TAA033500K05				
	600/5A	7	TAA033600K05	1	TAA033600L05		
TAA083 51x80,5	300/5A	2	TAA083300K05				
	400/5A	3	TAA083400K05				
	500/5A	4	TAA083500K05				
	600/5A	5	TAA083600K05				
	800/5A	5	TAA083800K05	1	TAA083800L05		
	1000/5A	5	TAA0831K0K05	1	TAA0831K0L05		
	1200/5A	5	TAA0831K2K05	1	TAA0831K2L05		
TAA123 80,5x121,5	1500/5A	5	TAA0831K5K05	1	TAA0831K5L05		
	600/5A	3	TAA123600K05				
	800/5A	3	TAA123800K05	1	TAA123800L05		
	1000/5A	5	TAA1231K0K05	1	TAA1231K0L05		
	1200/5A	5	TAA1231K2K05	1	TAA1231K2L05		
TAA163 81x161,5	1500/5A	7	TAA1231K5K05	1	TAA1231K5L05		
	2000/5A	10	TAA1232K0K05	1	TAA1232K0L05		
	1000/5A	10	TAA1631K0K05	5	TAA1631K0L05		
	1200/5A	10	TAA1631K2K05	5	TAA1631K2L05		
	1500/5A	15	TAA1631K5K05	10	TAA1631K5L05		
	2000/5A	15	TAA1632K0K05	10	TAA1632K0L05	1	TAA1632K0M05
	2500/5A	20	TAA1632K5K05	10	TAA1632K5L05	1	TAA1632K5M05
	3000/5A	20	TAA1633K0K05	15	TAA1633K0L05	1	TAA1633K0M05
	4000/5A	30	TAA1634K0K05	20	TAA1634K0L05	1	TAA1634K0M05
	5000/5A	30	TAA1635K0K05	20	TAA1635K0L05	1	TAA1635K0M05

Per esecuzione con secondario /1A sostituire l'ultima cifra 5 con 1.



For execution with secondary /1A replace the last digit 5 with 1.




Sigla morsetti primario e secondario
Primary and secondary connections marking

OPZIONI - OPTIONS


Coprimorsetti (Coppia) cod. 9SBMCTAA
Terminals cover (Pair) cod. 9SBMCTAA




TAA033 - kg 0,75



TAA083 - kg 1,1



TAA123 - kg 1,4

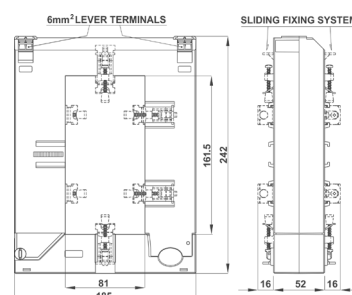

TAA163 - kg 3,15